



LAND



SEA



AIR

SK232

SlimSAS x8 to MXM carrier board




- 2x SlimSAS x8
- 1x MXM 3.0 Slot
- 1x VGA
- 4x Mini Display Ports
- 1x 2P Terminal for DC-IN 12V
- Extended Temp.: -40°C to 85°C



Introduction

SK232, a SLimSAS x8 to MXM carrier board that is capable of bridging MXM interface to SlimSAS connector and it has been designed to withstand extended temperature from -40°C ~ 85°C. SK303 has four Mini Display ports and one VGA port; and 12V input for MXM, 5V for VGA, 3V for Fan.

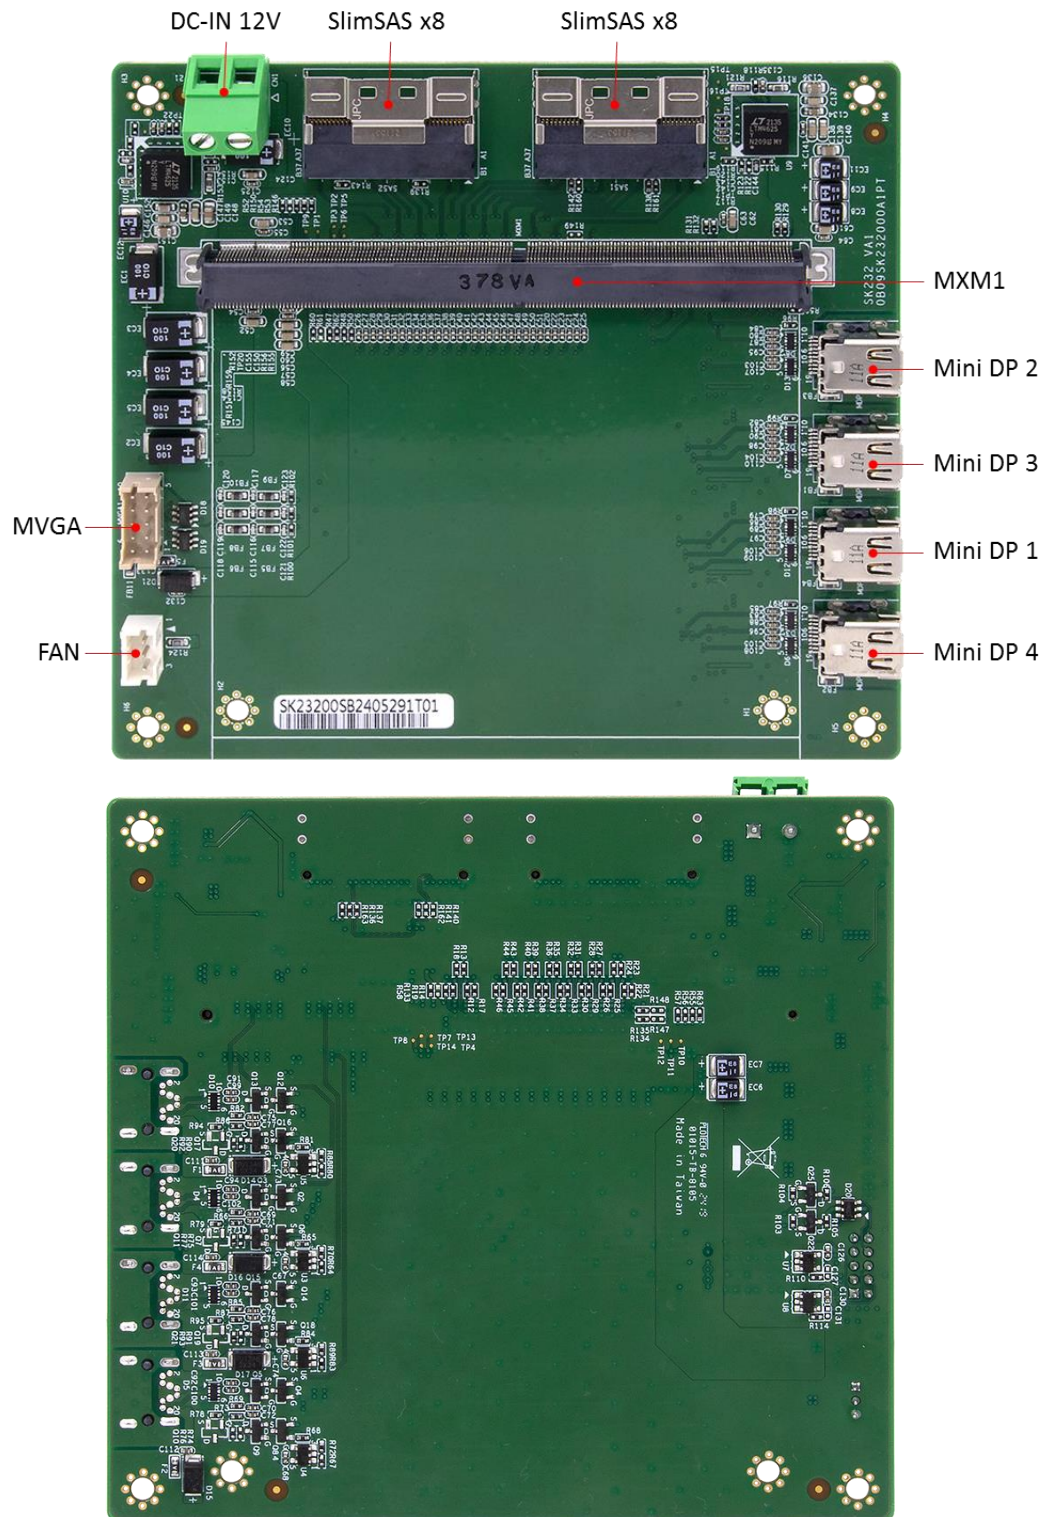

Revision

Date	Description	Remark
2024/7/12	Initial version	

Specifications

SYSTEM

Form Factor	I/O module
SlimSAS	2x x8
MXM 3.0 slot	1x
VGA	1x
Mini DP	4x
Power Input	1x 2P Terminal (12V DC-IN)
Max. Power	12V x 10A = 120W

Mechanical and Environment

Dimension	105 x 110 mm
Operating Temp.	-40°C to 85°C
Storage Temp.	-50°C to 90°C

Block Diagram

